


F8. About program. Overview

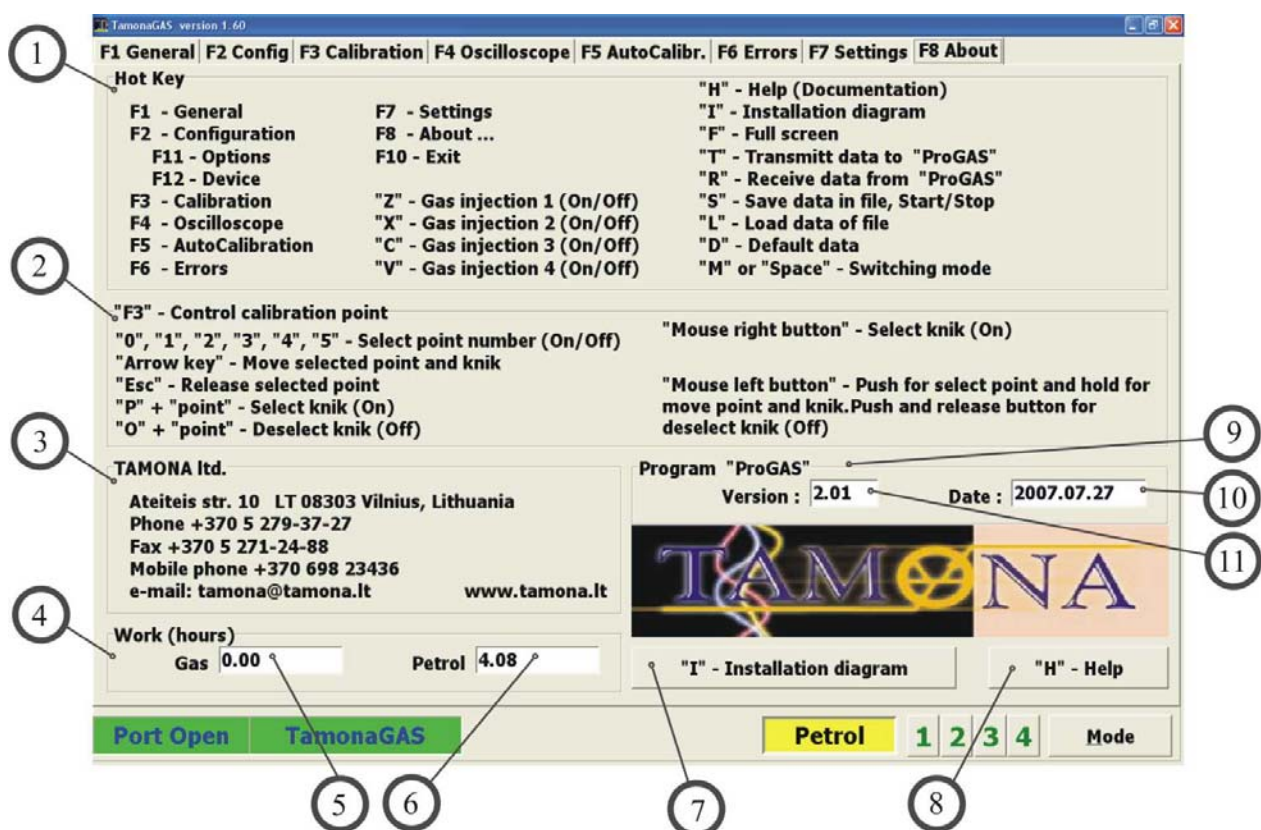

General

The TamonaGAS program is designed for Windows 98/2000/XP. It is distributed free and compatible for previous ProGAS system. It has multi-lingual interface. Installation is described in [Install_eng.pdf](#) (Installation of TamonaGAS program). Bookmarks descriptions refer to specific files (file name (bookmark, chapter point)). It is possible look through any active bookmark by pressing key 'H' (Help). Any document is available for review by means of starting TamonaGAS program and in bookmark "O ..." (F8) by pressing button "Help". Most control buttons, configuration parameters and settings have pop-up prompts. In order to see them, click the cursor with mouse on the button and wait for a while.

1. Block of "Hot keys" description. See below..
2. Description block of control calibration points. See details in <F3_eng.pdf> (F3. Calibration? Diagram control).
3. Manufacturer's data. Contact details (address, phone, fax, etc.) .
4. **Block of information of the whole operating time of ProGAS system.**
5. The whole operating time (hours) in Gas mode.
6. The whole operating time (hours) in Petrol mode.
7. Button of reviewing scheme of ProGAS connection. Fast recall is carried out by key "I" (Install) pressing (from any shortcut).
8. Button of reviewing program description "file name.pdf) Fast recall is carried out by key "H" (Help) pressing (from current shortcut).
9. **Block of information of ProGAS program. Program name.**
10. Program create date (if connected).
11. Program version (if connected).

F8. About program. “Hot ” keys (F8.1).

Detailed description

Attention! The numbers of bookmarks where “hot” keys are available are shown in parenthesis. If the number is not indicated those „hot“ keys work from any bookmark. For example, button of scheme review of ProGAS connection – key “I” (Install) is active from any bookmark and key “R” (Receive) is active only in bookmarks „Configuration“ (F2) and „Calibration“ (F3).

- F1** – opens main bookmark
- F2** – opens configuration bookmark
 - F11** – opens configuration bookmark - options
 - F12** – opens configuration bookmark- devices
- F3** – opens calibration bookmark
- F4** – opens oscilloscope bookmark
- F5** – opens autocalibration bookmark
- F6** – opens errors bookmark
- F7** – opens bookmark of TamonaGAS program adjustment
- F8** – opens bookmark of program
- F10** – quits from TamonaGAS program

- Z** – switches on/off nozzle 1
- X** - switches on/off nozzle 2
- C** - switches on/off nozzle 3
- V** - switches on/off nozzle 4

I (Install)

- review of ProGAS connection scheme.

H (Help)

- review of file description of the program bookmark from which Help started, i.e. if bookmark “Calibration” (F3) is active that after button “H” pressing, description of this bookmark is opening.

F (Full screen)

- switches on/off “Full screen” mode.

T (Transmit)

- transmits configuration and calibration data to ProGAS (F2, F3).

R (Receive)

- receives configuration and calibration from ProGAS (F2, F3).

S (Save, Start, Stop)

- saves configuration and calibration data in file [name].CFG (F2, F3);
- starts / stops oscilloscope operation (F4);
- starts/stops autocalibration (F5);
- saves program settings into file “TamonaGAS.INI” (F7).

L (Load)

- loads configuration and calibration data from file “[name].CFG” (F2, F3);
- loads settings from file “TamonaGAS.INI” (F7).

D (Default)

- loads factory’s data of configuration and calibration (F2, F3);
- loads factory’s data of program settings (F7).

M (Mode) or ‘Space’

- switches performance modes (“Automatic”, “Gas”, “Petrol”) of ProGAS.